### 

#### 000000 000:





# 000000 00000000:

	+0.000 "/ -0.005"
	± 0.010 "
	≤ 3 0000 0000
	900 0000 00
0.63 @ []um.	
	105.

# \_\_\_\_\_**\_\_\_\_\_\_\_\_\_\_\_\_\_\_\_\_\_\_\_**

	ET ([[])	
19/20.	3.	
25/25.4	3.	
28.	8.	
30.	3/4.	MMR / UC@10.6 □□ ATFR / UC@10.6um.
38.1.	3/4/8.	
44.45.	9.525.	
50.8.	5/51.	
50.8.	9.525.	
76.2.	6.35.	

# 

	<b>ET</b> (□□)	
25.	3.	
30.	3/4.	RPR-90 / UC@10.6
50.8.	9.525.	
76.2.	6.35.	




## 📫 Advantage

- High purity, low absorption material (body absorption less than 0.0005/cm-1)
- High damage threshold coating (>8000W/cm2).
- Lens focusing reaches diffraction limit

# Laser light path schematic

① Laser tube ② First mirror ③ Second mirror ④ Third mirror ⑤ Focus lens

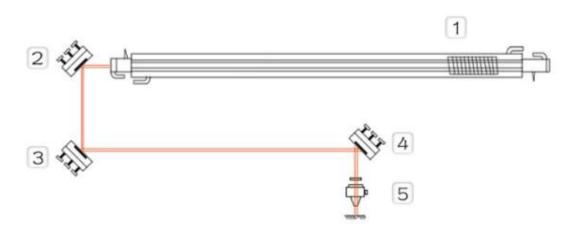











PerkinElmer Lambda 950---Testing Transmission and Reflectivity














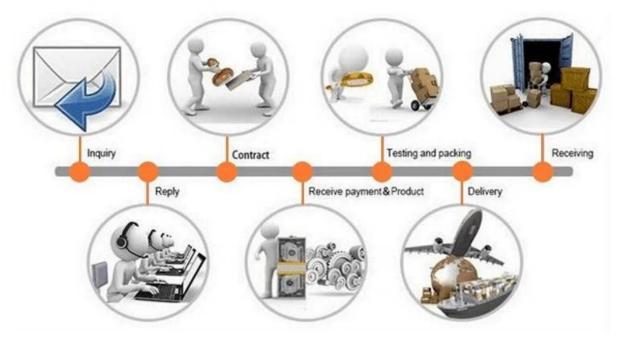



#### 

- .00000  $(3\ 000000\ 000000\ )$

#### 

000000 0000000 0000000 0000000 dhlo upso 0000000 tnto ems 000

#### 

 $Q1. \ \Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box\Box$ 

Q2.How [\_\_\_\_\_\_ \_\_\_ \_\_\_\_\_

Q4.How [][] [][]

Q5.May 00000000 000 000000 00000 0000

A6: NO OCONO DE ACCIONA DE COMO DE COM

Q7.How [][[] [][] [][] [][ OEM [][ ODM[]

98. 000000 000 0000 00 000 000

A8: 0000 00 00000 T / T 000 000 000000 00000 00000 00000.