




[www.carmanhaas.com](#), 我们提供 foldmirror 的多种尺寸和规格。我们提供多种规格，包括 delivety 规格。我们提供多种规格，包括 Cu 规格。我们提供多种规格，包括 "substratedue" 规格。我们提供多种规格，包括 highthermal 规格。我们提供多种规格，包括 Cu 规格。我们提供多种规格，包括 uncoated 规格。我们提供多种规格，包括 andRF 规格。我们提供多种规格，包括 becustomized 规格。

www.carmanhaas.com

□□□□□□	□□□□□□□□
□□□□ □□□□□□□□	+ 0.0 / -0.1mm
□□□□ □□□□□□□□	± 0.1 □□□□
□□ □□□□□□	> = 90% □□□□□□
□□□□□□ / □□□□□□	□□ 1: 40-20, □□ 2: □□□□ □□□□
□□□□□□	<1'
bevelling	<0.2×45°
□□□	□□□□ □□□□□□ □□□□□□ □□□□□□□□

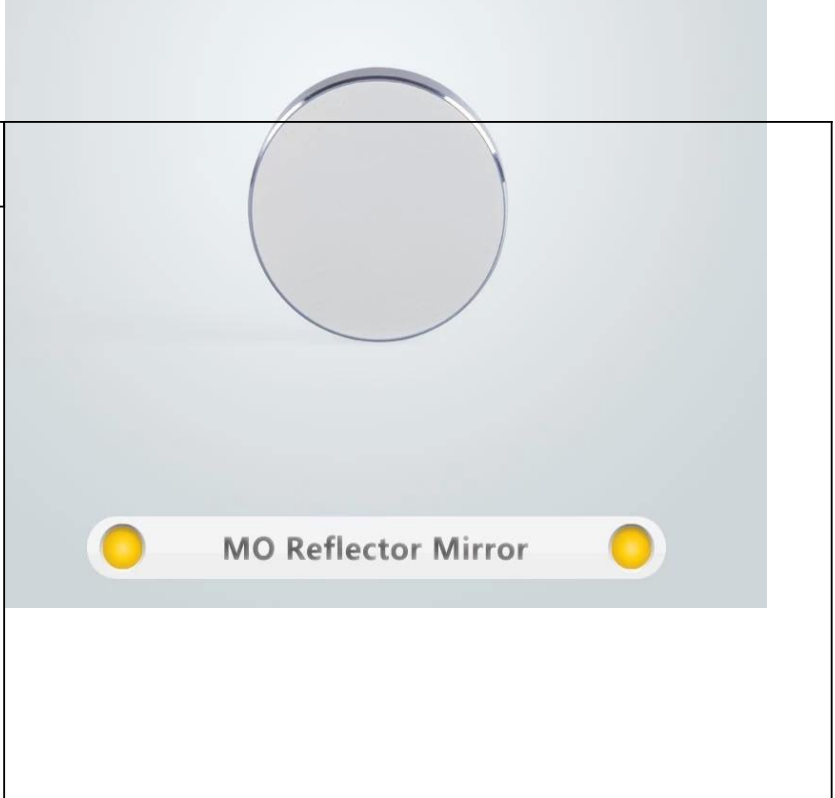

□□ / □□	□□□□□□ (□□□□□)	E.T. (□□□□□)	□□□□□□□□	□□□	□□□□□□□□□□
□□□□□-193	19	3	□□□□□□□□□□	Uncoating	□□□□□□□□□□, □□□□ □□□□□□□□ □□ □□□ □□□□□□ □□ □□□ □□□□□□□□ □□□□□□□□
□□□□□-203	20	3			
□□□□□-253	25	3			
□□□□□-303	30	3			
□□□□□-383	38.1	3			
□□□□□-403	40	3			
□□□□□-505	50.8	5			

□□□□□□□□□□

Detail Image






Advantage

- High purity, low absorption material (body absorption less than $0.0005/\text{cm}^{-1}$)
- High damage threshold coating ($>8000\text{W}/\text{cm}^2$)
- Lens focusing reaches diffraction limit

Laser light path schematic

① Laser tube ② First mirror ③ Second mirror ④ Third mirror ⑤ Focus lens

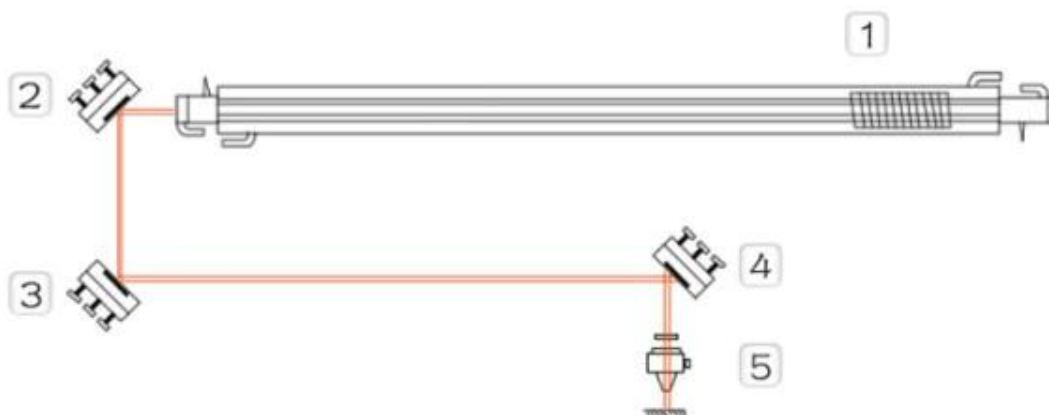

Packaging & Shipping

Packaging 1



Packaging 2



Packaging 3




Shipping 4





TRIOPTICS OptiSpheric 2000 AF
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

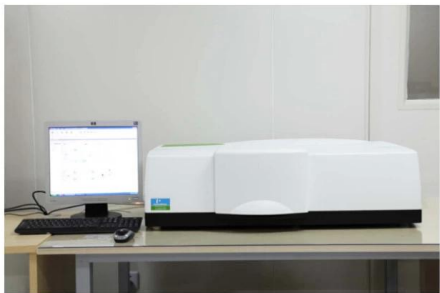

PerkinElmer Lambda 950---Testing Transmission and Reflectivity



Carmanhaas Coating Machine

