

PSI 3D 3-Axis Laser Tracker

[PSI 3D 3-Axis Laser Tracker](#) is a high-precision 3-axis laser tracker system. It is used for measuring large and complex parts in a 3D coordinate system. The system consists of a laser tracker head, a base, and a probe. The laser tracker head is mounted on the base and emits a laser beam. The probe is attached to the end of the laser beam and is used to measure the part. The system is highly accurate and is used in a wide range of applications, including aerospace, automotive, and industrial manufacturing.

The PSI 3D 3-axis laser tracker system is a highly accurate and reliable measuring system. It is used for measuring large and complex parts in a 3D coordinate system. The system consists of a laser tracker head, a base, and a probe. The laser tracker head is mounted on the base and emits a laser beam. The probe is attached to the end of the laser beam and is used to measure the part. The system is highly accurate and is used in a wide range of applications, including aerospace, automotive, and industrial manufacturing.



The PSI 3D 3-axis laser tracker system is a highly accurate and reliable measuring system. It is used for measuring large and complex parts in a 3D coordinate system. The system consists of a laser tracker head, a base, and a probe. The laser tracker head is mounted on the base and emits a laser beam. The probe is attached to the end of the laser beam and is used to measure the part. The system is highly accurate and is used in a wide range of applications, including aerospace, automotive, and industrial manufacturing.

1030-10 9 0 □□□□ □□□□□□ □□□□□□ □□□□

Model	PSH14-H	PSH20-H	PSH30-H
Input laser power (MAX.)	CW: 1000W @ fiber laser Pulsed: 500W @ fiber laser	CW: 3000W @ fiber laser Pulsed: 1500W @ fiber laser	CW: 1000W @ fiber laser Pulsed: 150W @ fiber laser
Water cool/sealed scan head	yes	yes	yes
Aperture (mm)	14	20	30
Effective Scan Angle	±10°	±10°	±10°
Tracking Error	0.19 ms	0.28ms	0.45ms
Step Response Time(1% of full scale)	≤ 0.4 ms	≤ 0.6 ms	≤ 0.9 ms
Typical Speed			
Positioning / jump	< 15 m/s	< 12 m/s	< 9 m/s
Line scanning/raster scanning	< 10 m/s	< 7 m/s	< 4 m/s
Typical vector scanning	< 4 m/s	< 3 m/s	< 2 m/s
Good Writing quality	700 cps	450 cps	260 cps
High writing quality	550 cps	320 cps	180 cps
Precision			
Linearity	99.9%	99.9%	99.9%
Resolution	≤ 1 urad	≤ 1 urad	≤ 1 urad
Repeatability	≤ 2 urad	≤ 2 urad	≤ 2 urad
Temperature Drift			
Offset Drift	≤ 3 urad/°C	≤ 3 urad/°C	≤ 3 urad/°C
Qver 8hours Long-Term Offset Drift (After 15min warn-up)	≤ 30 urad	≤ 30 urad	≤ 30 urad
Operating Temperature Range	25°C±10°C	25°C±10°C	25°C±10°C
Signal Interface	Analog: ±10V Digital: XY2-100 protocol	Analog: ±10V Digital: XY2-100 protocol	Analog: ±10V Digital: XY2-100 protocol
Input Power Requirement (DC)	±15V@ 4A Max RMS	±15V@ 4A Max RMS	±15V@ 4A Max RMS

1030-1090nm F-Theta Lenses

Part Description	Focal Length (mm)	Scan Field (mm)	Max Entrance Pupil (mm)	Working Distance(mm)	Mounting Thread
SL-(1030-1090)-170-254-(20CA)-WC	254	170x170	20	290	M85x1
SL-(1030-1090)-250-425-(30CA)-WC	425	250x250	30	475	M132x1
SL-(1030-1090)-142-277-(15CA)-WC	277	142x142	15	340	M85x1
SL-(1030-1090)-254-420-(15CA)-WC	420	254x254	15	509	M85x1
SL-(1030-1090)-230-420-(20CA)-WC	420	230x230	20	509	M85x1
SL-(1030-1090)-410-650-(20CA)-WC	650	410x410	20	562	M85x1

1030-1090nm Beam Expander


Part Description	Expansion Ratio	Input CA (mm)	Output CA (mm)	Housing Dia(mm)	Housing Length(mm)	Mounting Thread
BE-(1030-1090)-D26:45-1.5x-A	1.5X	18	26	44	45	M30x1 M43x0.5
BE-(1030-1090)-D53:118.6-2x-A	2X	30	53	49	118.6	M30x1
BE-(1030-1090)-D37:118.5-2x-A-WC	2X	18	37	59	118.5	M30x1

1030-1090nm Protective Window

Part Description	Diameter(mm)	Thickness(mm)	Coating
Protective Window	98	4	AR/AR@1030-1090nm
Protective Window	113	5	AR/AR@1030-1090nm
Protective Window	120	5	AR/AR@1030-1090nm
Protective Window	160	8	AR/AR@1030-1090nm

1030-1090nm QBH Collimating Optical Module


Part Description	Focal Length (mm)	Clear Aperture (mm)	NA	Coating
CL2-(1030-1090)-30-F60-QBH-A-WC	60	28	0.22	AR/AR@1030-1090nm
CL2-(1030-1090)-30-F75-QBH-A-WC	75	28	0.17	AR/AR@1030-1090nm
CL2-(1030-1090)-30-F100-QBH-A-WC	100	28	0.13	AR/AR@1030-1090nm
CL2-(1030-1090)-38-F75-QBH-A-WC	75	34	0.22	AR/AR@1030-1090nm
CL2-(1030-1090)-38-F100-QBH-A-WC	100	34	0.16	AR/AR@1030-1090nm
CL2-(1030-1090)-38-F125-QBH-A-WC	125	34	0.13	AR/AR@1030-1090nm

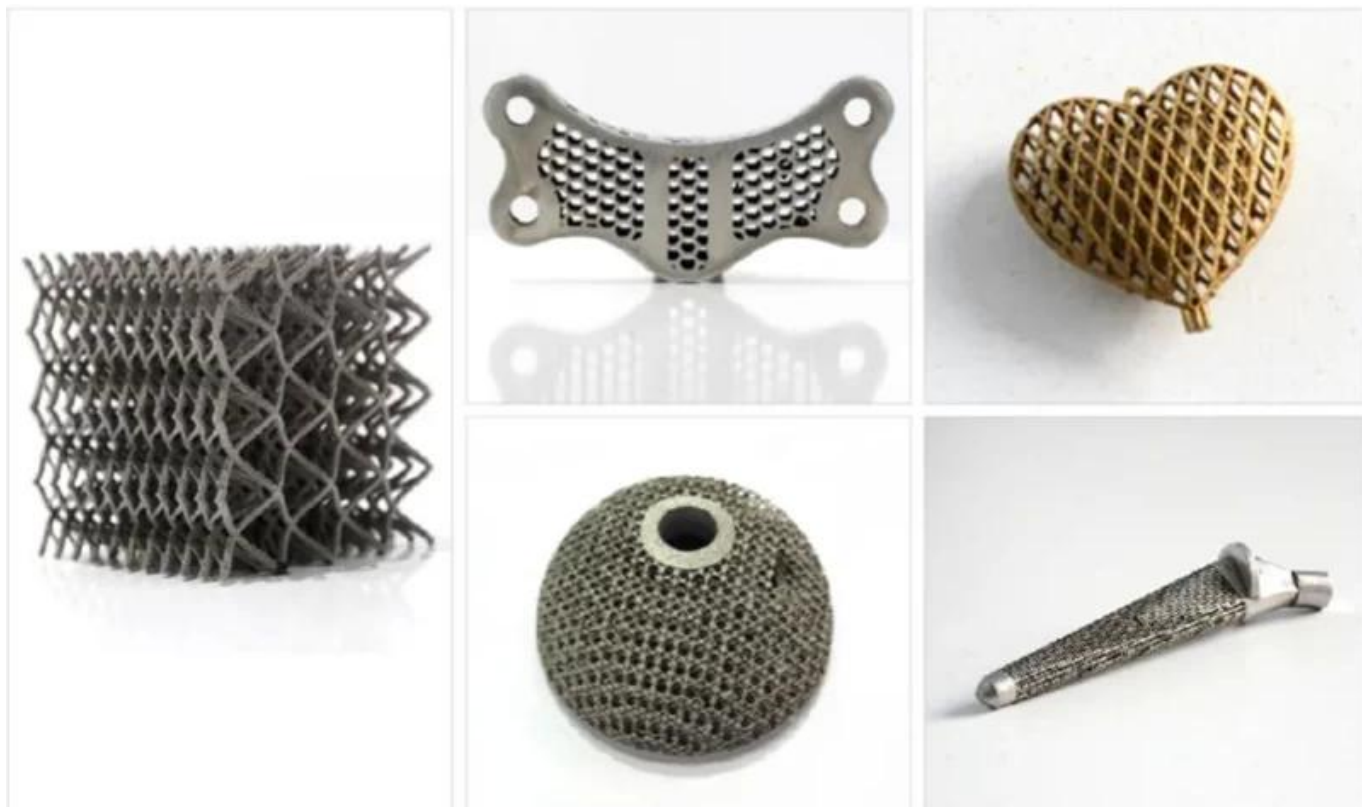


Die Steel



Titanium Alloy

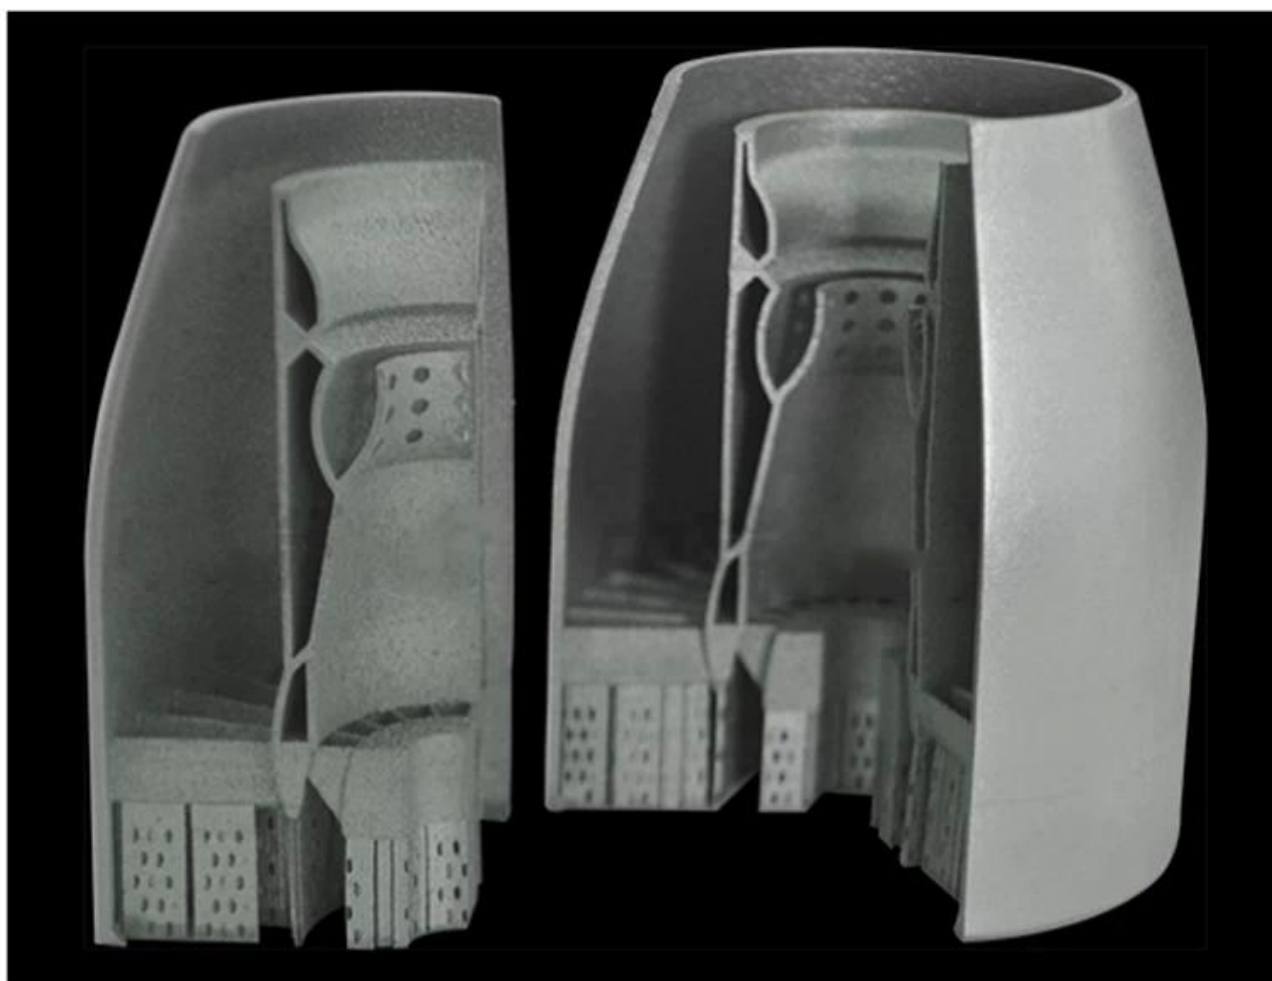

Aluminium Alloy ($AlSi_{10}Mg$)

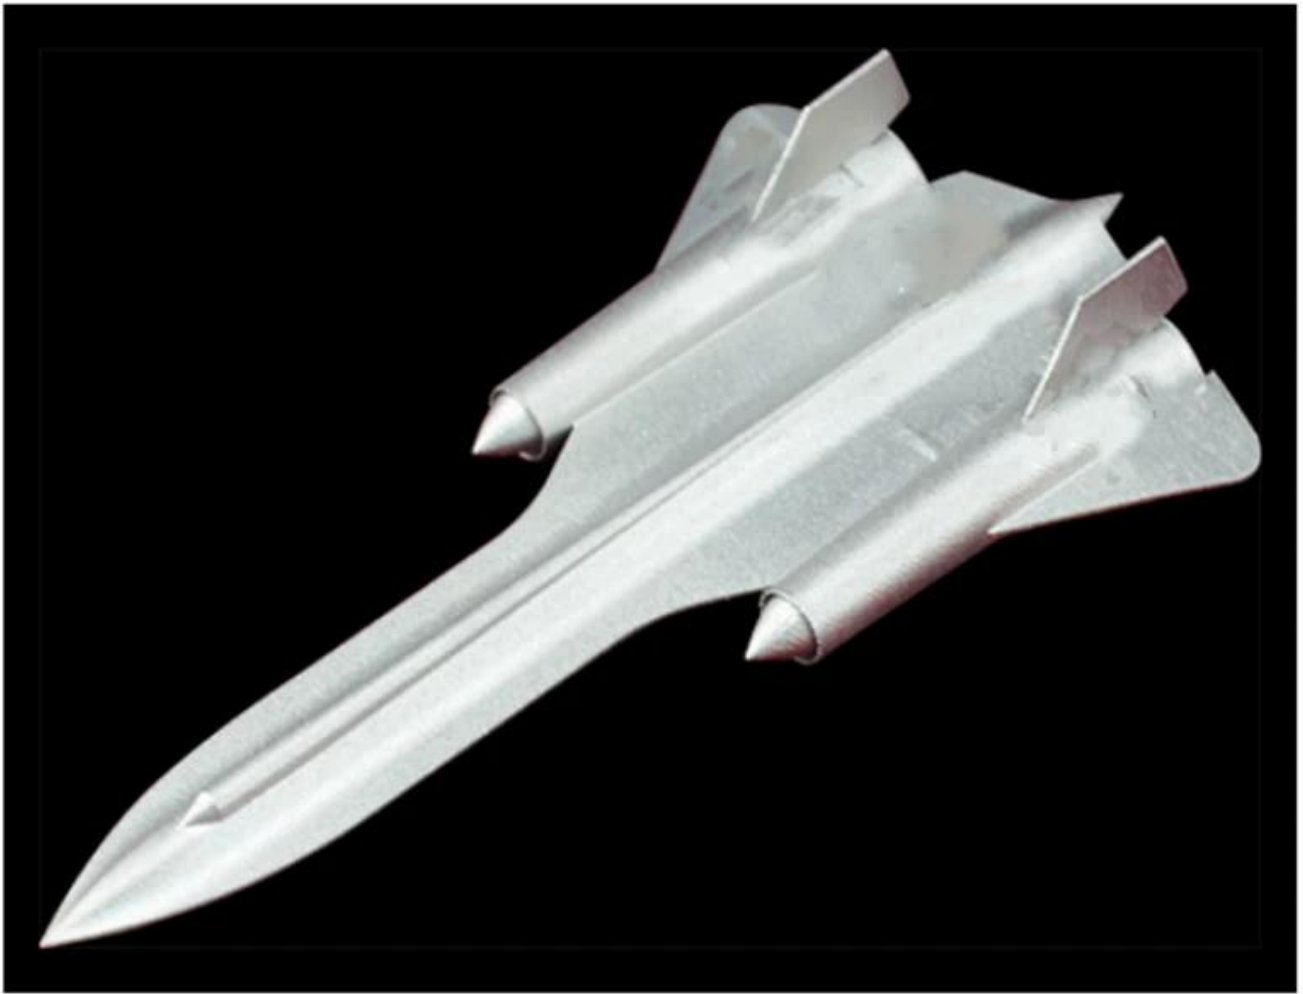


Co-Cr Alloy (MP1)



□□□□□□□□



TRIOPTICS OptiSpheric 2000 AF
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

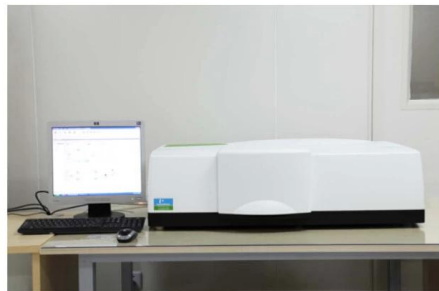

PerkinElmer Lambda 950---Testing Transmission and Reflectivity



Carmanhaas Coating Machine





□□□□ □□□:

□□□□□ □ □□□□□□□ □□□ □□□□:

Q1) 如何選擇合適的供應商？

Q2) 如何選擇合適的生產廠家？

Q3) 如何選擇合適的銷售渠道？

Q4) 如何選擇合適的代理商？

Q5:

(1) 如何選擇合適的代理商？

(2) 如何選擇合適的代理商？

如何選擇合適的代理商

Q1) 如何選擇合適的代理商？

A1: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q2) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A2: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q3) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A3: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q4) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A4: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q5) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A5: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q6) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A6: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q7) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

A7: 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素。

Q8) 代理商的選擇，應考慮代理商的實力、信譽、市場佔有率、服務質量、產品種類、價格、交貨時間等因素？

□ 8: □□ □□□□□□ □□□□ □□ □□□□ □□□□ □□ □□ MOQ □□ □□ □□ / □□ □□□□□□ □□□□□□ □□ □□□□ □□□□