

□□ □□ :

Carmanhaas □□ □□ 2D □□□ □□□ □□ □ □□, 3D □□□ □□□ □□ □ □□, □□□ □□□ □□ □□□ □□, □□ □□ □ □□ □ □□□ □□ □□ □□□□.

□□ (□□□) □ □□ □□□□ □□□ Carmanhaas 2-Axis Galvanometer □□□ □□□ □□□ □□ □□, □□□ □□, □□□ □□, □□□ □□□ □□□, 3D □□, □□□ □□, □□□ □□, □□ □□ □□ □□□ □□ □□□□□□□□. □□□□ □□.

□□:

1. □□□ : 7mm, 10mm, 12mm, 14mm, 16mm, 20mm, 30mm;
2. □□ □□□, □□□□ □□ □□□□□, □□□ □□□ □ □□ □□;
3. □□ □□□□ □□□□□ □□ □□□□ □□ □□ □□ □□;
4. □□□ □□□ □□ □□□□□□ □□□ □□□ □□□ □ □ □□□ □□;
5. □□ □□ □□□□□ □□ □□□□ □□ □□□□ □□□ □□.



□□	e10	e12.	e16.
□□□ □□	10mm	12mm.	16mm.
□□□□ □□ □□	± 20 °	± 20 °	± 20 °
□□ □□ □□	± 15VDC.	± 15VDC.	± 15VDC.
1 % □□ □□□	0.36ms.	0.4ms.	0.48ms.
□□ □□	3.5m / s.	3m / s.	2.5m / s.
□□ □□ □□	7m / s.	6.5m / s.	5.5m / s.



□□ □□	650cps.	600cps.	500cps.
□□ □□□	10μrad.	10μrad.	10μrad.
□□□□	<80ppm/K	<80ppm/K	<80ppm/K
□□□ □□□□	<50μrad/K	<50μrad/K	<50μrad/K
□□ □□	0.3mrad.	0.3mrad.	0.3mrad.
□□ □□	25 °C ± 10 °C	25 °C ± 10 °C	25 °C ± 10 °C
□□□ □□	xy2-100.	xy2-100.	xy2-100.
□□ □□	1064nm	1064nm	1064nm
□□	1.38kg.	1.52kg.	2.35kg.

# Detail Image




□□ □□□□ □□ :

屏蔽线接外壳

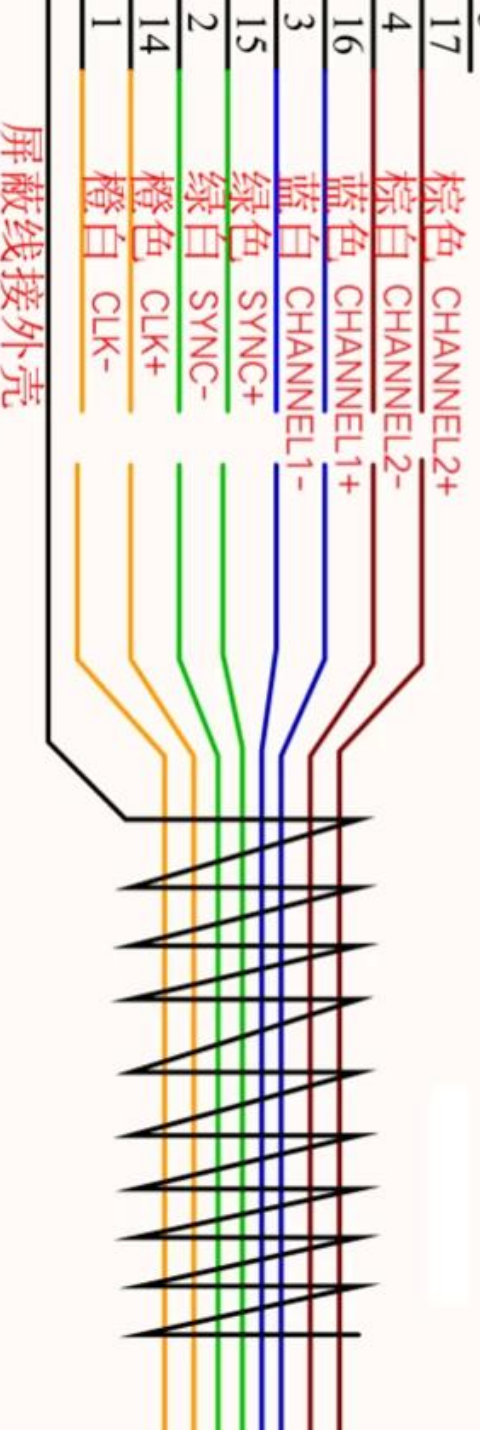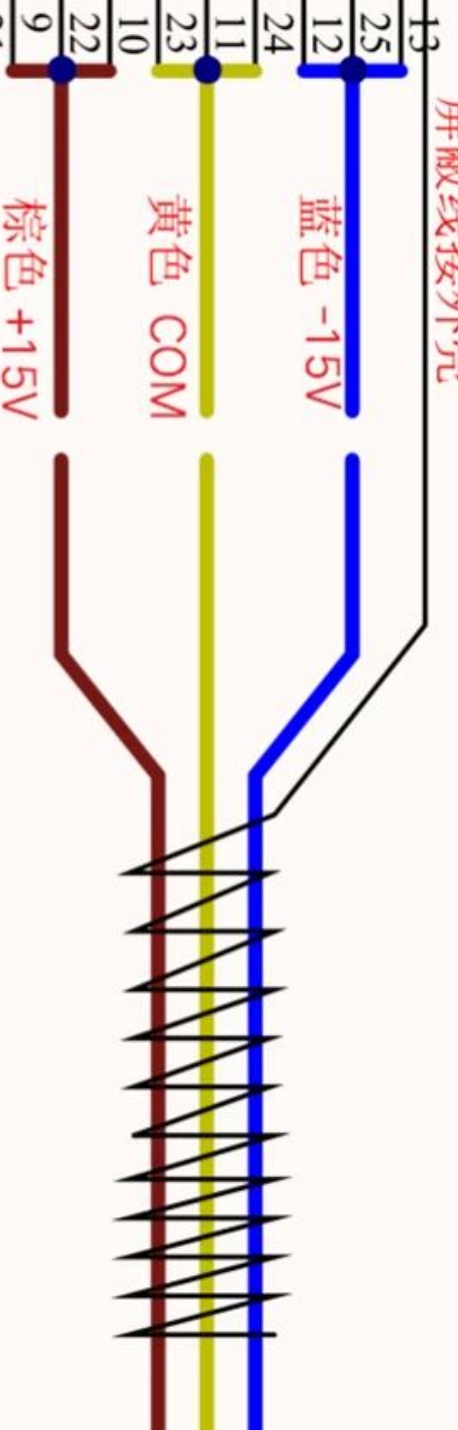

屏蔽线接外壳

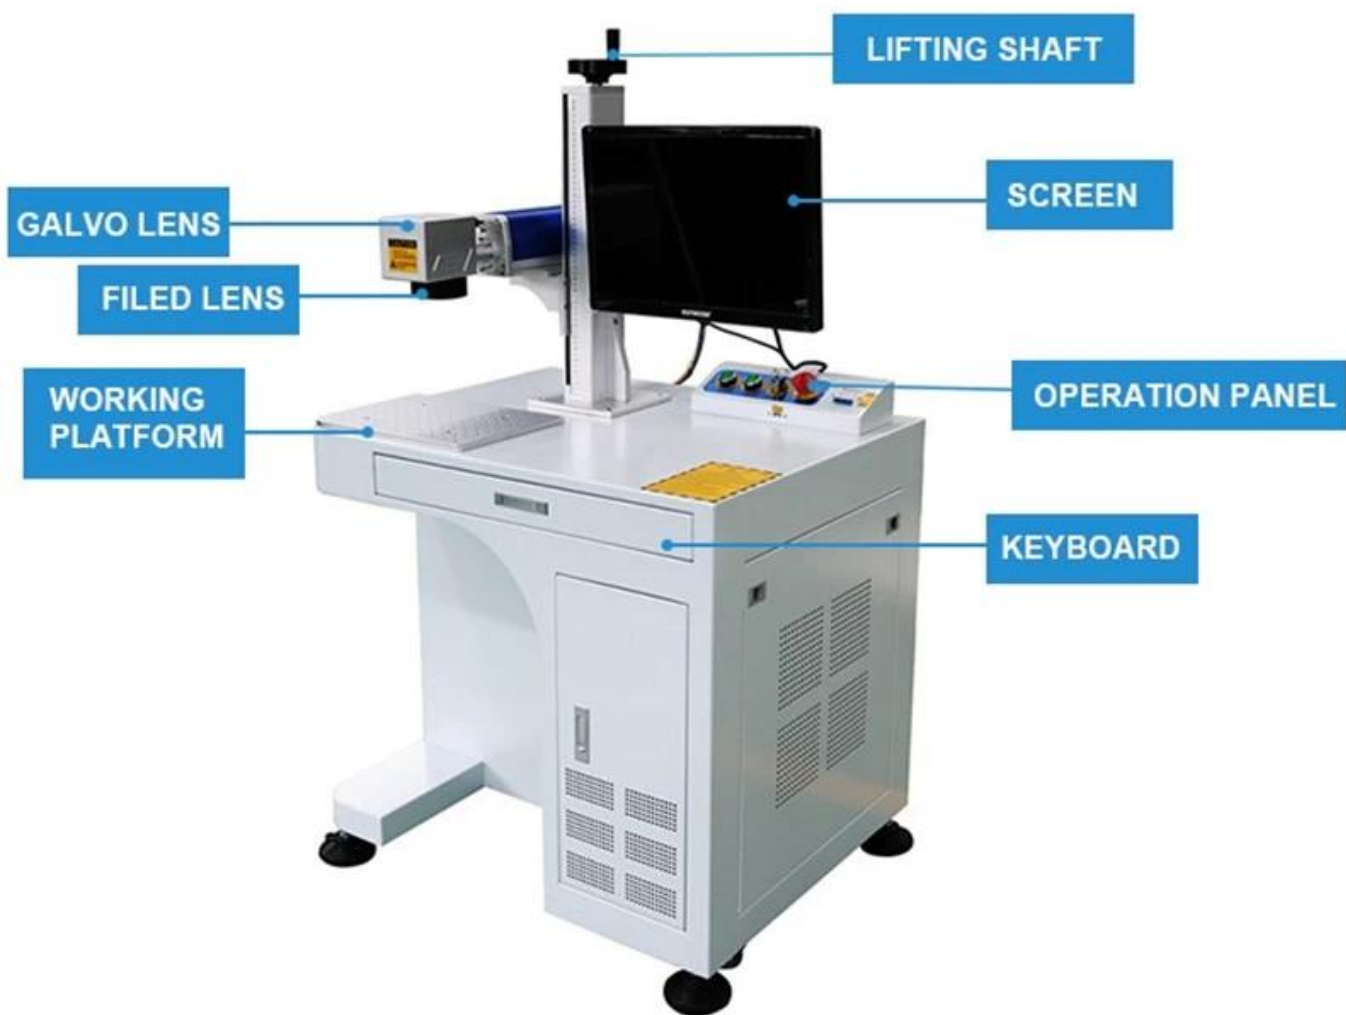



## 1064nm F Theta Scan Lenses



## Marking Software JCZ EZCard



## Fiber Marking Machine





# Packaging & Shipping

## Packaging 1




## Shipping 2



□ □ :



**TRIOPTICS OptiSpheric 2000 AF**  
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

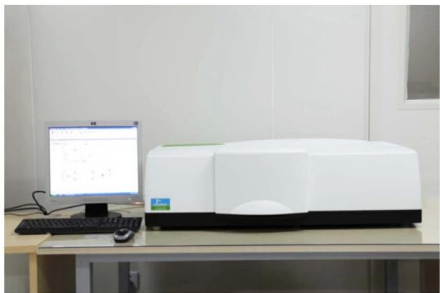

**PerkinElmer Lambda 950**---Testing Transmission and Reflectivity



**Carmanhaas Coating Machine**



□□□ :



□□ □□ :

□□□□□□□□.

1 □□) □ □ □□ □□□□ □□□□□□.

2 □□) □□□ □□□ □□ □□□ □ □□ □□ □□□□□□.

3 □□) □□□ □□ □ □□ □□□ □□□□□□.

4 □□) □□ □□ □□ □□□□□ □□□ □□□□□. Customized Galvo □□□ □□ □□ □□, □□ □□□ □□ Galvo □□□ □□ □□ □□ □□ □□ □□ Galvo □□□ □□ □□ □□, □□ □□□ □□ Galvo □□□ □□ □□ □□