

000 00 3D 00 000 00 SLM 000000 (0000 0000 00 00) 00 (0000 000000 0 00 00) 00 00000 00 000000. 0 0000 00000 0 0000 0 00 00 00 0000 0000 0 0000 00000 000000. 000000,0 000000 00 0000 00 0 0000 0000 00 0000 0000 00)00. SLM 0000 0 0000 0000 0000 00 0000 00000 00000 0000 000000. 0000 0000 0000 0000 00 00 0000 0000 00 0000 00 00 0 0 0000, 0000 0000 00000 0000 0000 00000.



Carmanhaas ([3D 0000 000 000 000](#)) 00000 3D 00 (000 000 00) 00 00000 00000 0000 3D 0000 000 0 00 0000 0 00000. 00 0 3D 0000 00000 0000 000 00 0 000000 00000. 00 3D 0000 3D 00 0000 0000 00000 0000 00000. 3D 00 0000 0000 000 00 00 00 00 0000 00 0000, 00 00 0000 00000 00 00 (0 : CNC)0000 00 0000 0000 00000.

00 0 0 00 Carmanhaas Laser ([0000 000 000 000](#)) 00 00 3D 0000 000 0000 0000000 0000000. 00 00 0 0000 00 0000 000000 0000 00000 00 3D 00 00 0000000 00000 00 0000 0000000. 3D 00 00000 00 0 00 00 200-500W 3D 00 0000 00 0000 0000 0 00 0 00 00000 0000000 00 0000000. 00 0000 00, 00 00 (00), 00 00, 00 00, 00 00 00 000000.

00 3D 0000 00 :

[SLM 00 0000 000 000 000](#)

Part Description	Focal Length (mm)	Scan Field (mm)	Max Entrance Pupil (mm)	Working Distance(mm)	Mounting Thread
SL-(1030-1090)-170-254-(20CA)-WC	254	170x170	20	290	M85x1
SL-(1030-1090)-170-254-(15CA)-M79x1.0	254	170x170	15	327	M79x1
SL-(1030-1090)-290-430-(15CA)	430	290x290	15	529.5	M85x1
SL-(1030-1090)-290-430-(20CA)	430	290x290	20	529.5	M85x1
SL-(1030-1090)-254-420-(20CA)	420	254x254	20	510.9	M85x1
SL-(1030-1090)-410-650-(20CA)-WC	650	410x410	20	560	M85x1
SL-(1030-1090)-440-650-(20CA)-WC	650	440x440	20	554.6	M85x1

1030-1090nm QBH Collimating □ □□


Part Description	Focal Length (mm)	Clear Aperture (mm)	NA	Coating
CL2-(1030-1090)-25-F50-QBH-A-WC	50	23	0.15	AR/AR@1030-1090nm
CL2-(1030-1090)-30-F60-QBH-A-WC	60	28	0.22	AR/AR@1030-1090nm
CL2-(1030-1090)-30-F75-QBH-A-WC	75	28	0.17	AR/AR@1030-1090nm
CL2-(1030-1090)-30-F100-QBH-A-WC	100	28	0.13	AR/AR@1030-1090nm

1030-1090nm □ □□□


Part Description	Expansion Ratio	Input CA (mm)	Output CA (mm)	Housing Dia(mm)	Housing Length(mm)
BE-(1030-1090)-D26:45-1.5X-A	1.5X	18	26	44	45
BE-(1030-1090)-D53:118.6-2X-A	2X	30	53	70	118.6
BE-(1030-1090)-D37:118.5-2X-A-WC	2X	18	34	59	118.5

1030-1090nm □□ □

Part Description	Diameter(mm)	Thickness(mm)	Coating
Protective Window	98	4	AR/AR@1030-1090nm
Protective Window	113	5	AR/AR@1030-1090nm
Protective Window	120	5	AR/AR@1030-1090nm
Protective Window	160	8	AR/AR@1030-1090nm

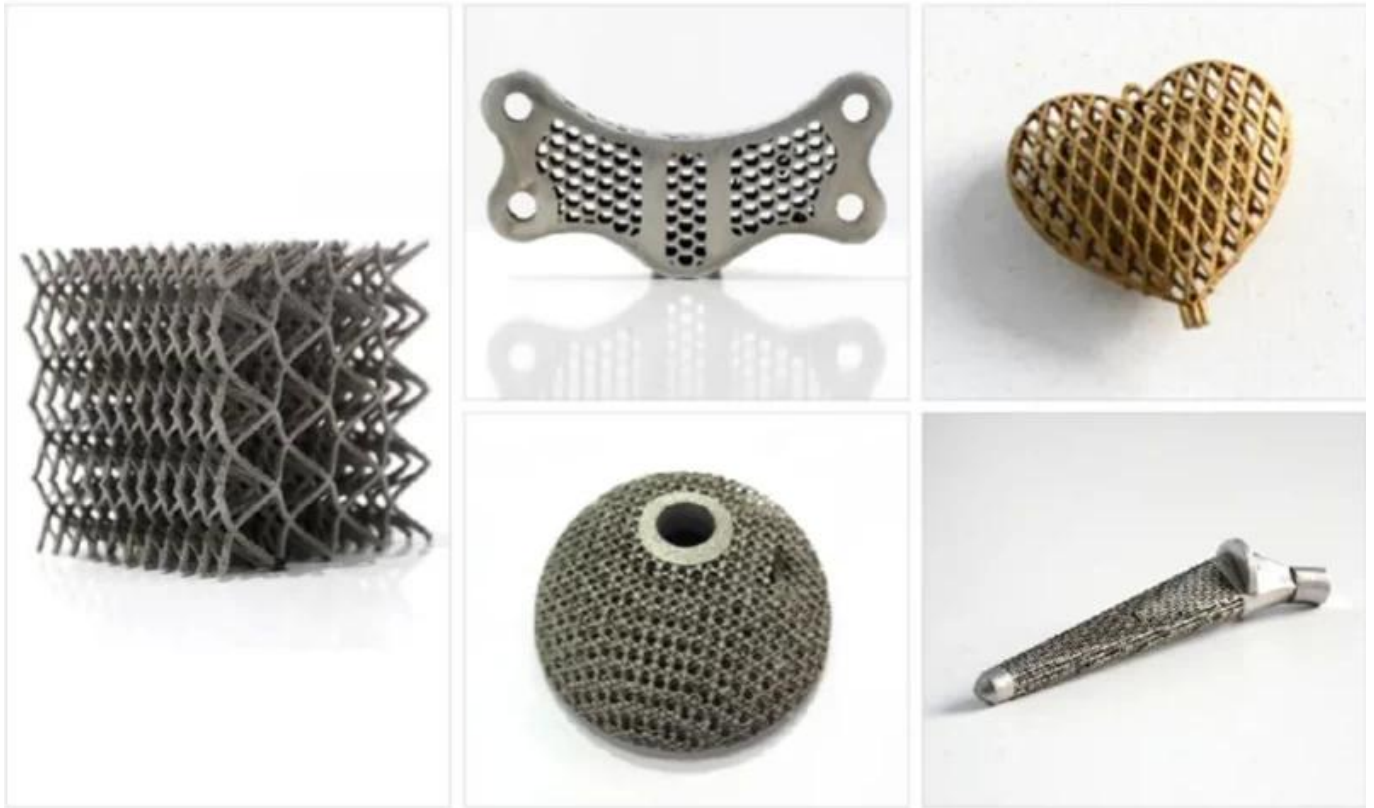

Titanium Alloy

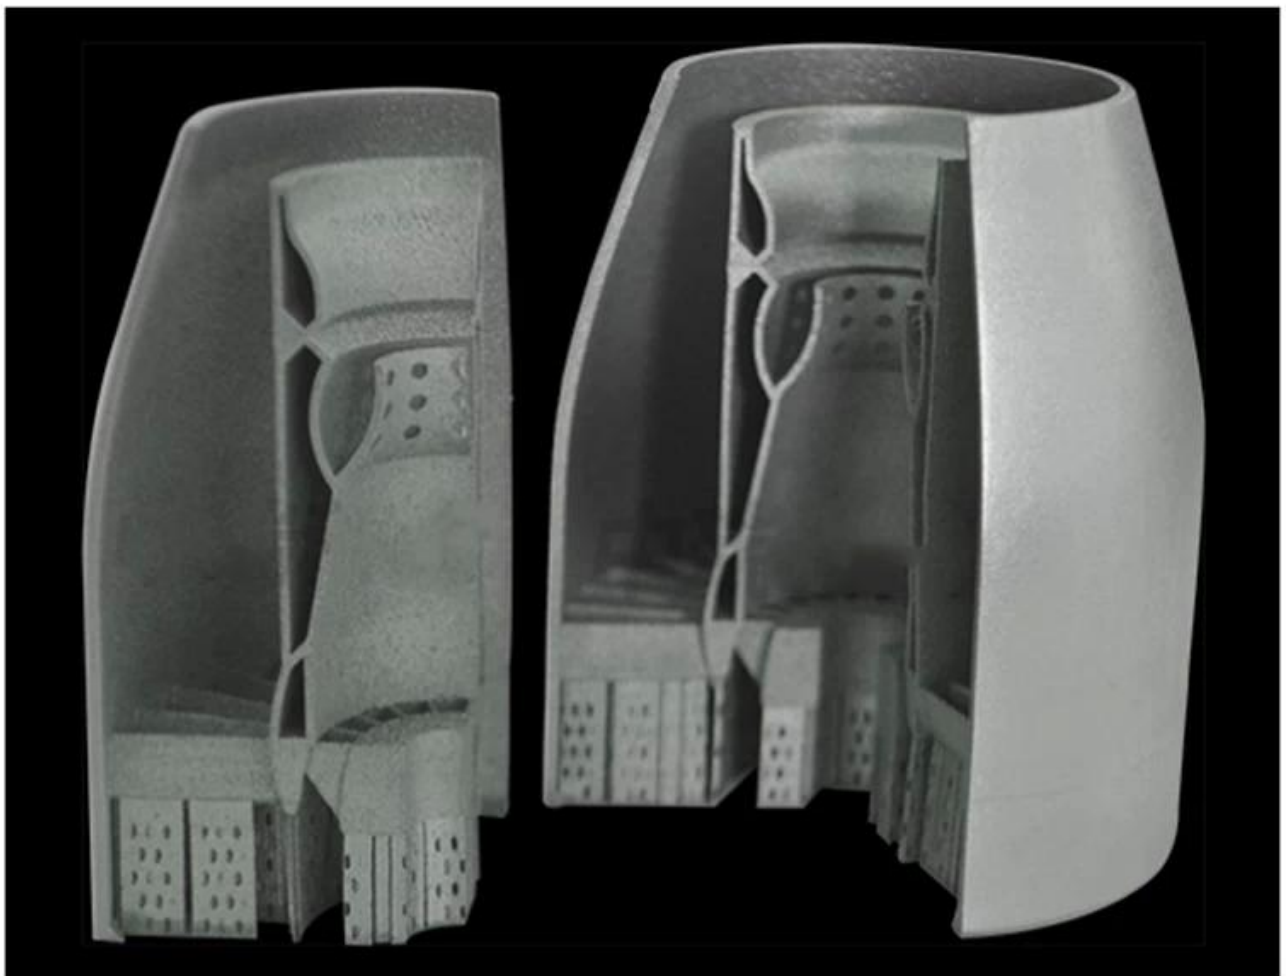

Aluminium Alloy ($AlSi_{10}Mg$)




Co-Cr Alloy (MP1)





TRIOPTICS OptiSpheric 2000 AF
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

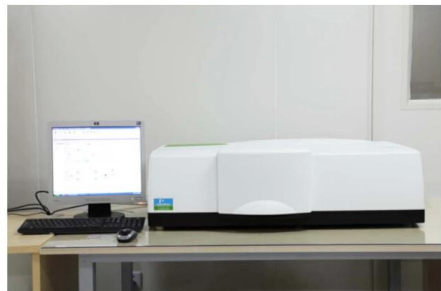


PerkinElmer Lambda 950---Testing Transmission and Reflectivity



Carmanhaas Coating Machine



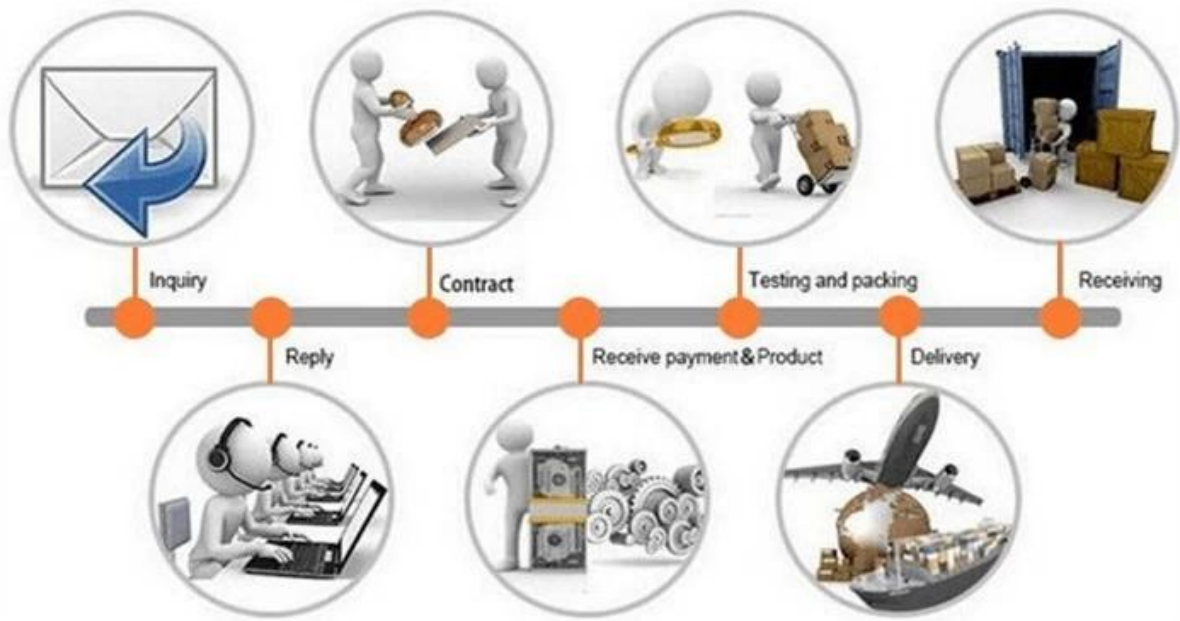

□□ □□ :

□□□□□□□□.

- 1 問) 〇 〇〇〇 〇〇〇〇 〇〇〇〇〇〇.
- 2 問) 〇〇〇 〇〇〇 〇〇 〇〇〇 〇 〇〇 〇〇 〇〇〇〇〇〇.
- 3 問) 〇〇〇 〇〇 〇 〇〇 〇〇〇 〇〇〇〇〇.
- 4 問) 〇〇 〇 〇〇 〇〇 〇〇〇 〇〇 〇〇〇 〇〇〇〇〇.

問 問:

- (1) 〇〇〇 〇〇 〇〇 〇〇〇 DHL, UPS, FedEx, TNT, EMS, ETS 〇 〇〇〇〇.
- (2) 〇〇〇〇〇〇〇〇〇, 〇 〇 〇〇〇〇〇〇〇〇 〇〇〇〇〇〇〇 〇〇FOB, CNF, CIF. 〇〇〇〇〇〇〇〇〇〇〇〇〇〇 〇〇〇〇〇〇〇〇〇〇〇〇〇 〇.

問問問 問

Q1. 〇〇〇〇〇 〇〇〇〇?

A1 : 〇, 〇〇〇 〇〇 〇〇〇 〇〇 〇 〇〇 〇〇〇 〇〇 〇〇〇〇〇 〇〇 〇 〇〇〇〇〇〇〇.

Q2. 〇〇〇 〇〇〇 〇〇〇?

A2 : 〇〇〇 〇〇〇 〇 QC 〇〇 〇〇 〇〇〇 〇〇〇 〇〇〇〇 〇〇 〇〇 〇, 〇〇 〇〇 〇 〇〇〇 〇〇〇〇 〇〇〇 〇〇〇 〇〇〇〇〇.

Q3. 〇〇〇 〇〇〇〇〇?

A3 : 〇〇〇 〇〇 〇〇〇〇 〇〇 〇〇〇〇 〇〇 〇〇〇〇〇 〇〇〇 〇〇〇〇〇.

Q4. 〇〇〇 〇〇〇〇〇〇〇〇?

A4 : 〇〇〇 〇〇〇〇〇 〇〇 〇〇 〇〇〇〇 〇〇 〇〇〇〇 〇〇〇〇 〇〇〇 〇〇 〇〇, 〇〇, 〇〇 〇〇 〇 〇〇 〇〇〇〇〇. 〇〇〇〇〇.

Q5. May May Marching 〇〇〇 〇〇〇〇〇 〇〇 〇〇〇 〇〇〇〇〇〇〇?

A5 : 〇! 〇〇〇 〇〇〇 〇〇〇 〇〇〇〇 〇〇〇〇〇 〇〇 〇〇〇 〇〇 〇〇 〇 〇〇〇〇.

Q6. 〇〇〇 〇〇 〇 〇 〇〇〇〇?

A6 : 〇, 〇〇〇 〇〇〇 〇〇〇 〇〇〇 〇〇〇〇 〇〇 〇〇〇〇〇.

Q7. OEM 〇〇 ODM 〇〇〇 〇〇〇 〇 〇 〇〇〇〇?

A7 : 〇〇 OEM / ODM ORD 〇〇 〇〇 〇〇〇 〇〇 〇〇〇 〇〇 〇〇〇 〇〇〇〇.ers. 〇〇〇 〇〇〇〇 〇〇〇〇〇 〇〇〇〇 〇〇 〇〇 〇〇〇〇〇.

Q8. 〇〇〇 〇〇〇 〇〇〇〇〇〇〇?

A8 : 〇〇〇 〇 〇〇〇 〇〇〇 〇〇〇 〇〇 〇〇 〇 MOQ 〇〇 T / T 〇〇 〇 〇 〇〇〇〇.