





□□□ □ □□ □□ :

□□□□ F □□ □□

Part Description	Focal Length (mm)	Scan Field (mm)	Max Entrance Pupil (mm)	Working Distance(mm)	Mounting Thread
SL-10.6-250-360	360	250x250	14/20	352.9	M85x1
SL-10.6-300-430	430	300x300	14/20	414.7	M85x1
SL-10.6-400-565	565	400x400	14/20	536.5	M85x1

□□□□ □ □□□□

Part Description	Expansion Ratio	Input CA (mm)	Output CA (mm)	Housing Dia (mm)	Housing Length(mm)	Mounting Thread
BE-10.6-D17:64.5-3x	3X	11	15	25	64.5	M22*0.75
BE-10.6-D17:70.5-4x	4X	11	15	25	70.5	M22*0.75
BE-10.6-D20:72-5x	5X	11	18	25	72	M22*0.75
BE-10.6-D27:75.7-6x	6X	11	25.5	32	75.7	M22*0.75
BE-10.6-D27:71-8x	8X	11	25.5	32	71	M22*0.75

□□ (mm)	□□ (mm)	□□
80	□	AR / AR@10.6um
90	□	AR / AR@10.6um
110	□	AR / AR@10.6um
90 * 60	□	AR / AR@10.6um
90 * 70	□	AR / AR@10.6um

ZRPA12 (PA12 Nylon Powder)




PHYSICAL CHARACTERISTICS	Grain Size: 50~55µm Shape: Spherical Apparent density: ≥0.40 g/cm³
THERMAL PROPERTY	Melting Point: 182~185°C (10°C/min) Melting Enthalpy: ≥90 J/g HDT: 83.8°C @1.8MPa / 146.1°C @0.45MPa
MOLDING PERFORMANCE	Density: 0.97 g/cm³ Tensile Modulus: 1600 MPa Tensile Strength: 43 MPa Elongation at break: ≥15 % Un-notched Impact Strength: 20.7 KJ/m² Notched Impact Strength: 3.8 KJ/m² Bending Modulus: 1432 MPa Bending Strength: 57 MPa

GF100 (Glass Fiber Composite Nylon Powder)



PHYSICAL CHARACTERISTICS	Apparent density: ≥0.66 g/cm³
THERMAL PROPERTY	Melting Point: 183°C (10°C/min) HDT: 89°C @1.8MPa / 163°C @0.45MPa
MOLDING PERFORMANCE	Density: 1.24 g/cm³ Tensile Modulus: 3498 MPa Tensile Strength: 43 MPa Elongation at break: 5 % Un-notched Impact Strength: 19.26 KJ/m² Notched Impact Strength: 4.11 KJ/m² Bending Modulus: 2413 MPa Bending Strength: 67 MPa

MF100 (Mineral Fiber Composite Nylon Powder)

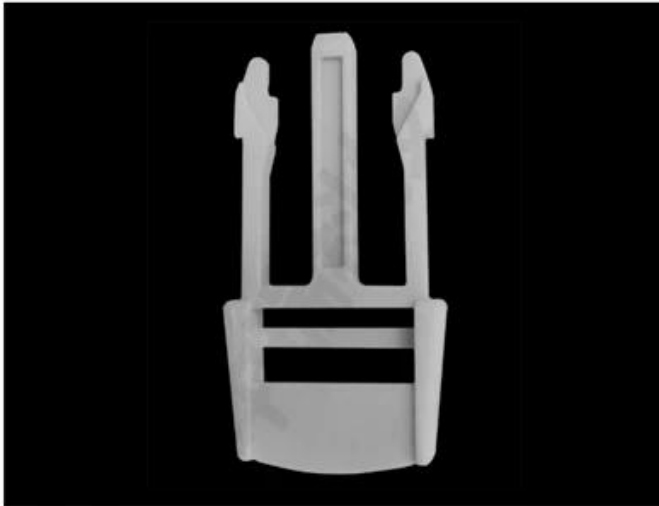

PHYSICAL CHARACTERISTICS	Apparent density: $\geq 0.53 \text{ g/cm}^3$
THERMAL PROPERTY	Melting Point: 180°C (10°C/min) HDT: 125°C @1.8MPa / 170°C @0.45MPa
MOLDING PERFORMANCE	Density: 1.18 g/cm^3 Tensile Modulus: 6128 MPa Tensile Strength: 50 MPa Elongation at break: 4.6 % Un-notched Impact Strength: 20.75 KJ/m^2 Notched Impact Strength: 5.58 KJ/m^2 Bending Modulus: 4630 MPa Bending Strength: 74 MPa

ZRTPU (Thermoplastic Polyurethanes Powder)




PHYSICAL CHARACTERISTICS	Grain Size: $60\mu\text{m}$ Shape: Spherical Apparent density: 0.47 g/cm^3
THERMAL PROPERTY	Melting Point: 165°C HDT Heat deflection temperature: -25°C
MOLDING PERFORMANCE	Density: 1.15 g/cm^3 Tensile Modulus: 61 MPa Tensile Strength: 21 MPa Elongation at break: 310 % Tear strength: 101 N/mm Bending Modulus: 74 MPa Bending Strength: 3.3 MPa





TRIOPTICS OptiSpheric 2000 AF
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

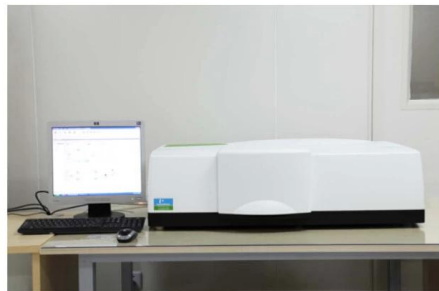

PerkinElmer Lambda 950---Testing Transmission and Reflectivity



Carmanhaas Coating Machine





