


## Co2 Laser Head With Mirror Mount



**Set A**

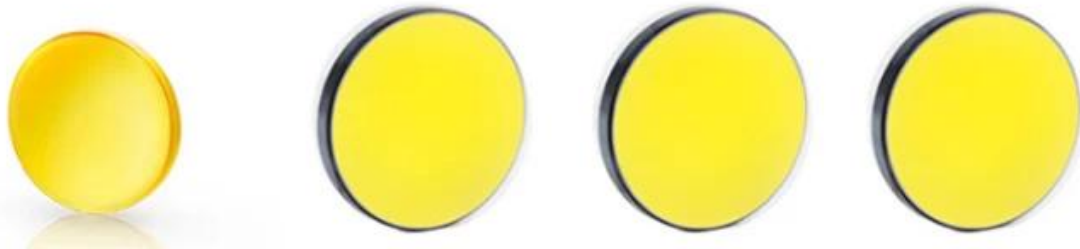

### **Technical Parameters:**

**ZnSe Focus Lens: Diameter: 19.05mm/20mm, FL: 50.8mm/63.5mm/75mm**


**Reflect mirror: Diameter: 20mm/ 25mm/ 30mm, ET: 3mm**

### **Application:**

**For CO2 Cutting Machine: Glass Tube: 40W, 60W, 80W, 100W, 130W, 150W**

## Laser light path schematic

① Laser tube ② First mirror ③ Second mirror ④ Third mirror ⑤ Focus lens

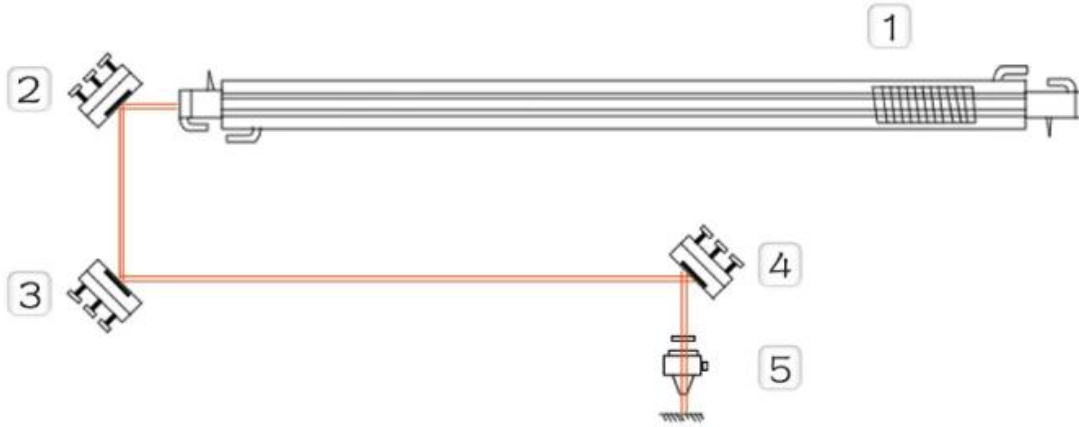



CARMAN HAAS





## Installation Schematic



## Lens Cleaning

### 1. For light pollution (dust, fiber particles) were flexible cleaning.

Using a blowing balloon, Blow off scattered contaminants on the surface of the optical element.



### 2. For light pollution (stains, fingerprints) were flexible cleaning.

Propanol, acetone glue with a cotton swab or alcohol to gently wipe the surface.



### 3. For moderately polluted (saliva, oil) in moderate-intensity cleaning.

Infiltrating distilled white vinegar with a cotton swab, wipe the surface a little pressure.



# Packaging & Shipping

## Packaging 1



## Packaging 2



## Packaging 3




## Shipping 4





**TRIOPTICS OptiSpheric 2000 AF**  
---Testing EFL, R, Centering Error, Wedge Angle, BFL, MTF

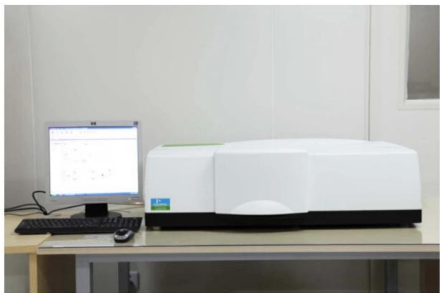

PerkinElmer Lambda 950---Testing Transmission and Reflectivity



**Carmanhaas Coating Machine**

